

3881xxxx MENTORLED XICATO

TECHNICAL DETAILS

- MentorLED Xicato XTM 9mm Integral interior Spotlight
- Colour Consistency: $\leq 1 \times 2$ step MacAdam ellipses
- LED Lifetime: 50,000Hrs (70% lumen maintenance)
- Supply Voltage: 230/240V 50/60Hz
- Weight: 0.95kg
- Glass Size: $\varnothing 100\text{mm}$
- Housing: Steel and aluminium with an epoxy polyester powder coated finish
- Driver: Integral constant current LED driver, mains dimmable version is suitable for leading or trailing edge dimmers.



XICATO



EXAMPLE SPECIFICATION

38810223-930-1-31

MentorLED Xicato XTM 9mm Integral Spotlight, Xicato Artist High CRI 1,300lm module run at 700mA producing 930lm, Self Dimmable, Warm White 3000K, 11° Narrow Beam, 3 Circuit Track Adapter, White Finish.

PRODUCT CODE EXAMPLE: 3881 0 22 3 - 930 - 1 - 3 1

LED MODULE CRI Ra (Av R1- R8)	Xicato XTM 9mm Artist 95+	Xicato XTM 9mm Standard Series 80+	Xicato XTM 9mm Vibrant 95+	Xicato XTM 9mm Vibrant 80+
Code	0	1	2	3

MODULE LUMEN	DRIVER CURRENT	Code	Lumen Output / Circuit Watts			
1300lm	500mA	21	700lm / 10.9W	965lm / 10.9W	700lm / 10.9W	965lm / 10.9W
	700mA*	22	930lm / 15.6W	1300lm / 15.6W	930lm / 15.6W	1300lm / 15.6W

GEAR TYPE**	Non-Dim	Mains Dim (5-100%)	Self Dim (0-100%)	0-10V Dim*** (0-100%)	DALI Dim*** (0-100%)
Code	1	2	3	4	5

COLOUR	CCT (K)	Artist Code	Standard Series Code	Vibrant 95+ Code	Vibrant 80+ Code
Incandescent White	2700 ± 40	927	827		
Warm White	3000 ± 50	930	830	930	830
Cool White	4000 ± 70	940	840		

BEAM	11° Narrow	18° Narrow 2	23° Medium
Code	1	2	3


MOUNTING	Surface	3 Circuit Eutrac	3 Circuit Data Eutrac***	Single Circuit Global	Single Circuit Eutrac	Single Circuit Data Eutrac***
Code	1	3	3C	4	4B	4C

FINISH	White (RAL 9010)	Black (RAL 9011)	Special (RAL / BS)
Code	1	2	3


* The preferred module and driver combination. Other variants to special order
 ** Due to the wide range of possible combinations - Not all gear types are available for all drive currents. Please enquire.
 *** Data track adapter required for remote dimmable gear options.

3881xxxx MENTORLED XICATO


EUTRAC 3 CIRCUIT TRACK ADAPTER

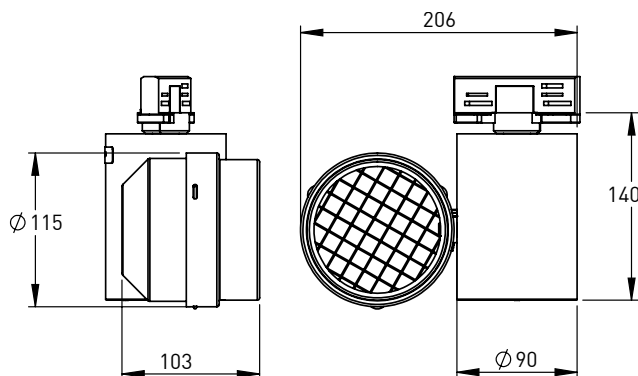


EUTRAC SINGLE CIRCUIT TRACK ADAPTER

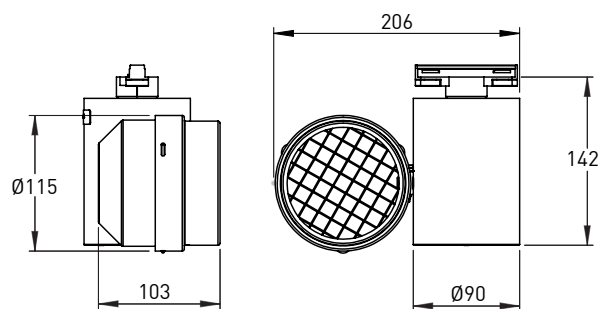


SURFACE MOUNT OPTION

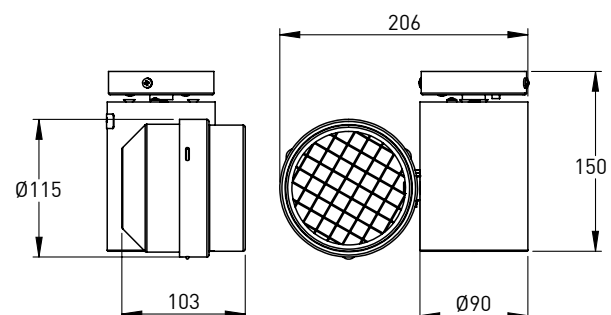

LS/ SINGLE CIRCUIT TRACK ADAPTER OPTION

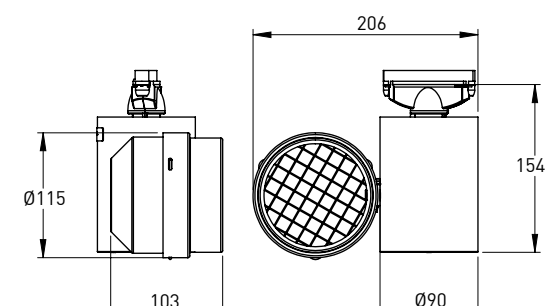

XICATO XTM 9MM LES 1300LM ARTIST MODULE DATA 15.6W 700MA

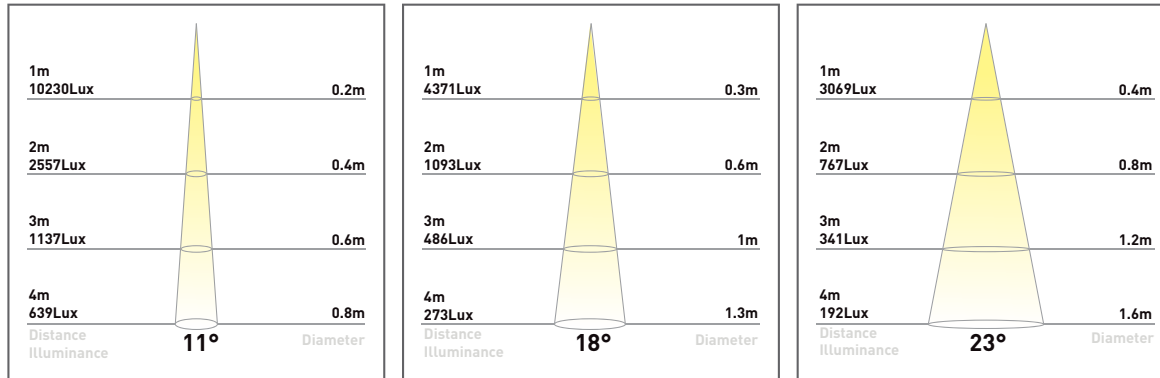

ACCESORIES

C Spring	248-0306
Replacement Standard Snoot	248-0307-*
Colour Glass ◇	248-0310-***
Spread Lens Ribbed ◇	248-0311
UV Filter ◇	248-0313
IR Filter ◇	248-0314
Colour Dichroic Glass	248-0315-***
Light Frost ◇	248-0316
Medium Frost ◇	248-0317
Heavy Frost ◇	248-0318
Eggcrate Louvre	248-0323-2
Full Tube Cowl	248-0328-*
11° Optic	248-39391
18° Optic	248-39392
23° Optic	248-39393

◇ Indicates C Spring is required
 * Finish / Glass colour