


484XXXX ARTLED REMOTE SPOTLIGHT

TECHNICAL DETAILS

Light Source: Xicato XTM LED Module
 Colour Consistency: 1x2 step MacAdam ellipses
 LED Lifetime: 50,000Hrs (70% lumen maintenance)
 Max Ambient Temperature: 40°C
 For full LED module details please see:
www.xicato.com/xtm-led-module/literature

Fitting Material: Aluminium
 Heatsink Material: Extruded Aluminium
 Fitting Finish: Polyester Powder Coated
 White Finish (Satin Silver Anodised Heatsink)
 Black Finish (Black Anodised Heatsink)
 Special RAL/BS Finish (enquire for heatsink finish)
 Weight: 1.5kg

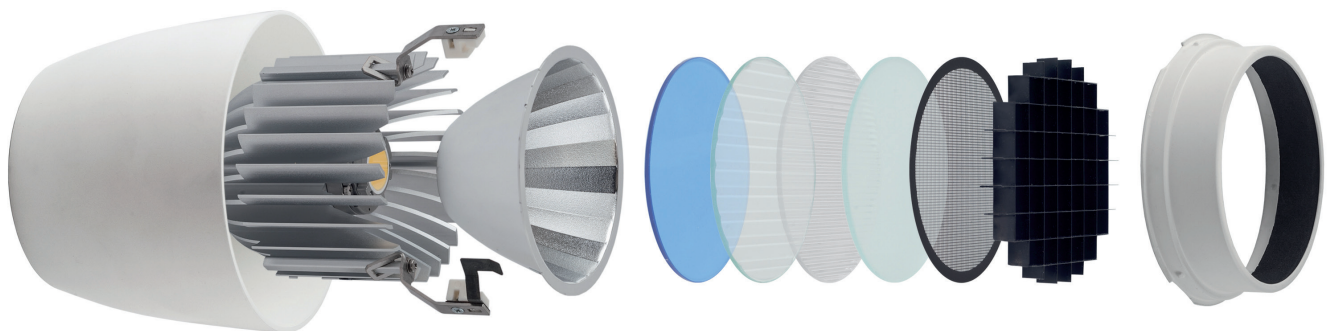

484XXXX ARTLED REMOTE SPOTLIGHT

EXAMPLE SPECIFICATION


4843400-930-3-11

ArtLED Remote Spotlight, Xicato XTM Artist 95+ CRI 3000lm module,
Warm White 3000K, 27° Medium Beam, on Ceiling Plate, White Finish.
Driver ordered separately.

PRODUCT CODE EXAMPLE: 484 **3 40 0** - **930** - **3** - **1 1**

LED MODULE CRI Ra (Av R1- R8)			Xicato XTM 19mm Artist 95+	Xicato XTM 19mm Standard Series 80+	Xicato XTM 19mm Vibrant 95+	Xicato XTM 19mm Vibrant 80+		
Code			3	4	5	6		
MODULE LUMEN	DRIVER CURRENT	Code	Lumen Output / Circuit Watts					
1300lm	700mA	20	1300lm / 13.3W	1300lm / 9.5W	1300lm / 13.3W	1300lm / 9.5W		
2000lm	700mA	30		2000lm / 15.2W		2000lm / 15.2W		
	1050mA	30	2000lm / 20W		2000lm / 20W			
3000lm	1050mA*	40	3000lm / 30.5W	3000lm / 25.7W	3000lm / 30.5W	3000lm / 25.7W		
4000lm	1400mA*	50		4000lm / 34.2W		4000lm / 34.2W		
COLOUR	CCT (K)	Artist Code	Standard Series	Vibrant 95+ Code	Vibrant 80+ Code			
Incandescent White	2700 ±40	927	827					
Warm White	3000 ±50	930	830	930	830			
Cool White	4000 ±70	940	840					
BEAM	No Reflector	14° Narrow	14° + Glare Control	27° Medium	27° + Glare Control	52° Wide	Wallwash	Wallwash + Softening Lens
Code	0	2	21	3	31	5	9	93
FINISH	White (RAL 9010)		Black (RAL 9011)		Special (RAL / BS)			
Code	1		2		3			

* The preferred module and driver combination. Other variants to special order
Due to thermal management the rotational tilt of lamp head is limited 100° (50° either side of vertical) . Standard rotational tilt 180° (90° either side of vertical).

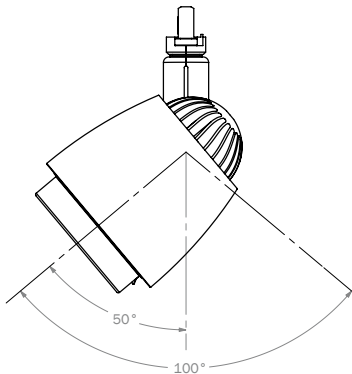

High lumen / drive current packages require Lamp head to be limited to 100° tilt, Standard tilt 180°

484XXX ARTLED REMOTE SPOTLIGHT

REMOTE DRIVERS

• 700mA 38W, DALI Dimmable (0/1-100%)	421848-700-10
• 700mA 37W, 1-10V Dimmable (1-100%)	421831-700-10
• 700mA 36W, Mains Dimmable (25-100%)	42161-10
• 1050mA 38W, DALI Dimmable (0/1-100%)	421848-1050-10
• 1050mA 50W, 1-10V Dimmable (1-100%)	421831-1050-10
• 1050mA 24W, Mains Dimmable (25-100%)	42166-10
• 1050mA 33W, Non Dim	421836-1050-10
• 1400mA 33W, Analogue 1 -10V (1-100%)	421829-10

ACCESSORIES AND SPARES

• Spare Optics Holder	248-4001-*
• Spare C Spring	248-4006
• 14° Narrow Beam Reflector	248-4939-2
• 27° Medium Beam Reflector	248-4939-3
• 52° Wide Beam Reflector	248-4939-5
• 14° Narrow Beam Reflector with Glare Control	248-4939-21
• 27° Medium Beam Reflector with Glare Control	248-4939-31
• Wallwash Reflector Assembly	248-4009-*
• Wallwash Reflector Assembly + Softening Lens	248-40093-*
• 13mm Eggcrate Louvre	248-4021-2
• 5mm Honeycomb Louvre	248-4052-2
• Scrim Filter 20% Obscured	248-4053-2
• Scrim Filter 30% Obscured	248-4050-2
• Scrim Filter 50% Obscured	248-4010-***
• Colour Glass	248-4011
• Ribbed Glass	248-40111
• Narrow Ribbed Pyrex Glass	248-40113
• Narrow Ribbed #555 Glass	248-4012
• Reeded Glass	248-40162
• Coarse Pattern Pyrex Glass	248-40161
• Light Frost Glass	248-4004-*


¹ Wallwash Reflector Assembly supplied with shallow holder that replaces standard Optics Holder

² Barn Doors incorporate an Optics Holder that is compatible with accessories and spares

*Finish - 1 = White, 2 = Black, 3 = Special RAL /BS

***Glass Colour

PHOTOMETRIC DATA - 1300lm MODULE DRIVEN AT 700mA

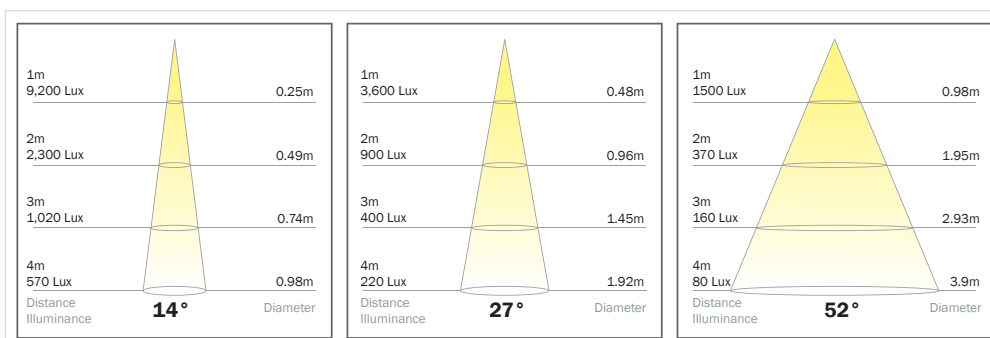

For other modules adjust figures pro rata e.g. for 2000lm multiply by 1.53 = 2000 / 1300

484XXXX ARTLED REMOTE SPOTLIGHT

SURFACE MOUNT OPTION DIMENSIONS

