

5380 EVICA ES12 REMOTE

TECHNICAL DETAILS

Cooling	Convection
IP rating	IP65 & IP40
Light Source	Fidelity 12W
Standard CCT	3000K Options 2700K/3000K/4000k/5600k/6500k
Standard CRI	98+
Rated Current	1050mA Max
Forward Voltage	12.6V
Housing material	Aluminium Anodised Black Options RAL Powder coated
Weight (Kg)	0.7
Beam Angles	2.8° / 5° / 12° / 34° / 60°
Head Diameter	95mm
Head Width	65mm
LED Lifetime	>85% lm at 60000 hours
Mounting ES12s	Yoke 13mm mounting hole
Mounting ES12w	Adjustable wall/column/floor bracket
Mounting ES12sm	75mm plate with 4 adjustable mounting holes
Safety & EMC	BS EN 60598-1, EAC TP TC 020/2011 approved
Safety standards	EMC Emissions: Compliance to BS/EN55015, EAC TP TC 020 EMC Immunity: Compliance to BS/EN61000-4-2,3,4,6,8, light industry level, criteria A, EAC TP TC 020

UK CA CE IP40 IP65   0.5m |  Dimmable Options



ES12s
Spotlight



ES12sm
Surface Mount



ES12w
Wallgrazer

5380 EVICA ES12 REMOTE

EXAMPLE SPECIFICATION

5380110-930-3-2A

ES12s Stirrup Mount fitting with No Snoot and Sealed Glass Front, IP20, Stirrup Mount, Gallery White 3000K 98 CRI LED, Remote Driver, 2.8° Beam Angle, Black Anodised Finish.

PRODUCT CODE EXAMPLE: 5380 1 1 0 0 - 930 - 3 - 2A

STYLE	Stirrup	Surface	Wall			
Code	1	2	3			
SNOOT	No Snoot, No Glass IP20	Half Snoot, No Glass IP20	Full Snoot, No Glass IP20	No Snoot + Glass IP65*	Half Snoot + Glass IP65*	Full Snoot + Glass IP65*
Code	1	2	3	4	5	6
GEAR VARIANT	Remote	On Board Dimmer				
Code	0	3				
If using On Board Dimmer please specify Non Dim Remote Driver						
LED COLOUR	Incandcent White 2700K 98+ CRI	Warm White 3000K 98+ CRI	Cool White 4000K 98+ CRI	Neutral White 5600K 98+ CRI	Daylight White 6500K 98+ CRI	
Lumens	710lm - 59lm/W	760lm - 63lm/W	820lm - 68lm/W	795lm - 66lm/W	820lm - 68lm/W	
Code	927	930	940	956	965	
BEAM ANGLE	2.8°	5°	12°	34°	60°	
Code	3	5	12	34	60	
HOUSING FINISH	White Painted RAL 9010	Black Anodised RAL 9005**	Anthracite Anodised RAL 7038**	Silver Anodised RAL 9006**	Special Custom Painted***	
Code	1	2A	5E	9	3	

* IP65 version only available on Stirrup and Wall Mount styles.

** Anodised finishes indicate approximate RAL colour match

*** Please specify custom RAL colour

DRIVERS

GEAR OPTION	CODE	
	INTERIOR	EXTERIOR
15W Non Dim	53809101	53809103
50W Non Dim	53809102	53809104
15W 1-10V Dim	53809111	53809113
50W 1-10V Dim	53809112	53809114
15W Phase Dim	53809121	53809123
50W Phase Dim	53809122	53809124
15W DALI Dim	53809131	53809133
50W DALI Dim	53809132	53809134
15W Casambi Dim	53809141	53809143
50W Casambi Dim	53809142	53809144
15W DMX Dim	53809151	53809153
50W DMX Dim	53809152	53809154

ACCESSORIES

General Accessories and Spares	CODE
Front Ring Plain	53809201-f
Full Snoot Plain	53809202-f
Half Snoot Plain	53809203-f
Honeycomb Louvre	53809204
Concentric Louvre	53809205
Barn Doors	53809206
Front Ring + Glass & Seals	53809211-f
Full Snoot + Glass & Seals	53809212-f
Half Snoot + Glass & Seals	53809213-f
Honeycomb + Glass & Seals	53809214
Concentric + Glass & Seals	53809215

f - Specify finish code from housing finish list from above

MODULAR OPTIONAL EXTRAS



HONEYCOMB LOUVRE



CONCENTRIC LOUVRE



IP65 GLASS SEALING KIT



HALF SNOOT




FULL SNOOT




BARN DOORS WITH FILTER HOLDER

5380 EVICA ES12 REMOTE

ES12S WITH NO SNOOT DIMENSIONS

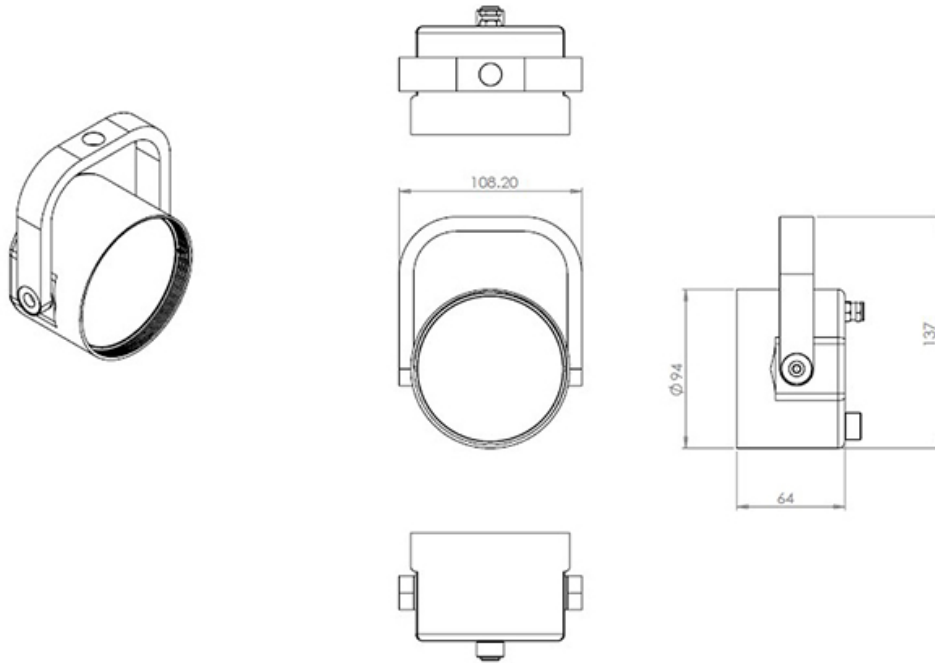


ES12S WITH SNOOT DIMENSIONS

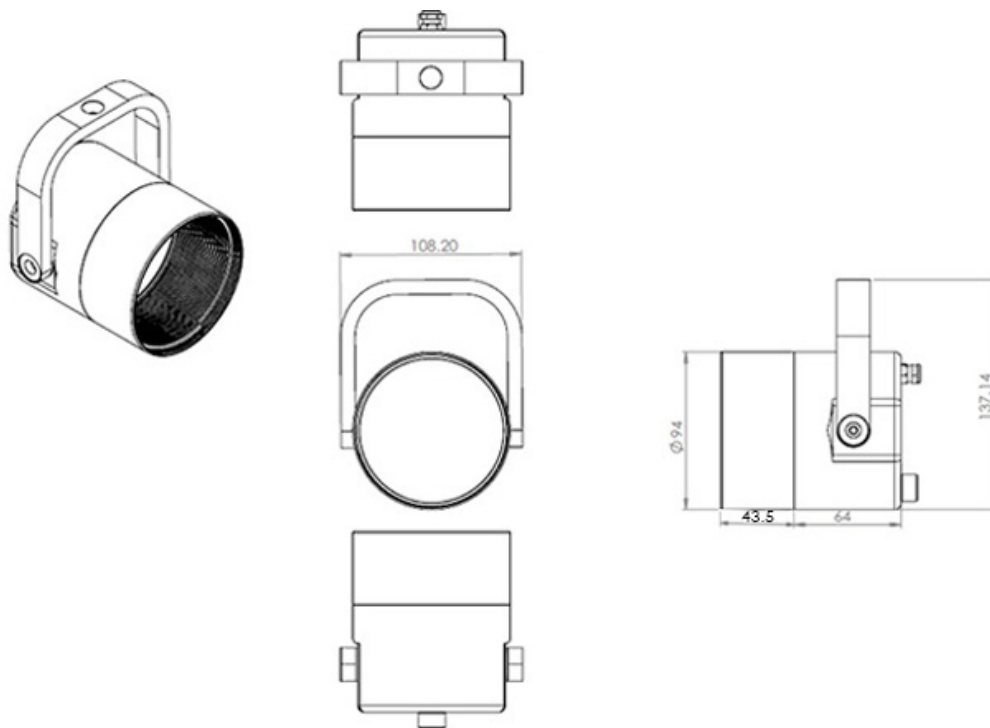


5380 EVICA ES12 REMOTE

ES12W WITH SNOOT DIMENSIONS

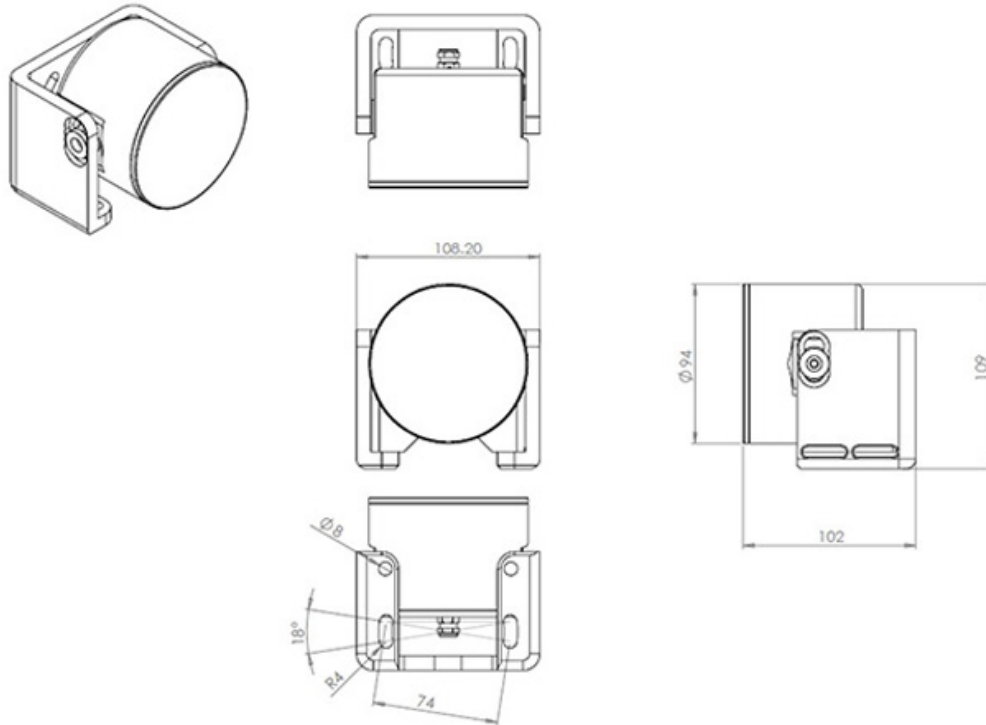


ES12W WITH SNOOT DIMENSIONS

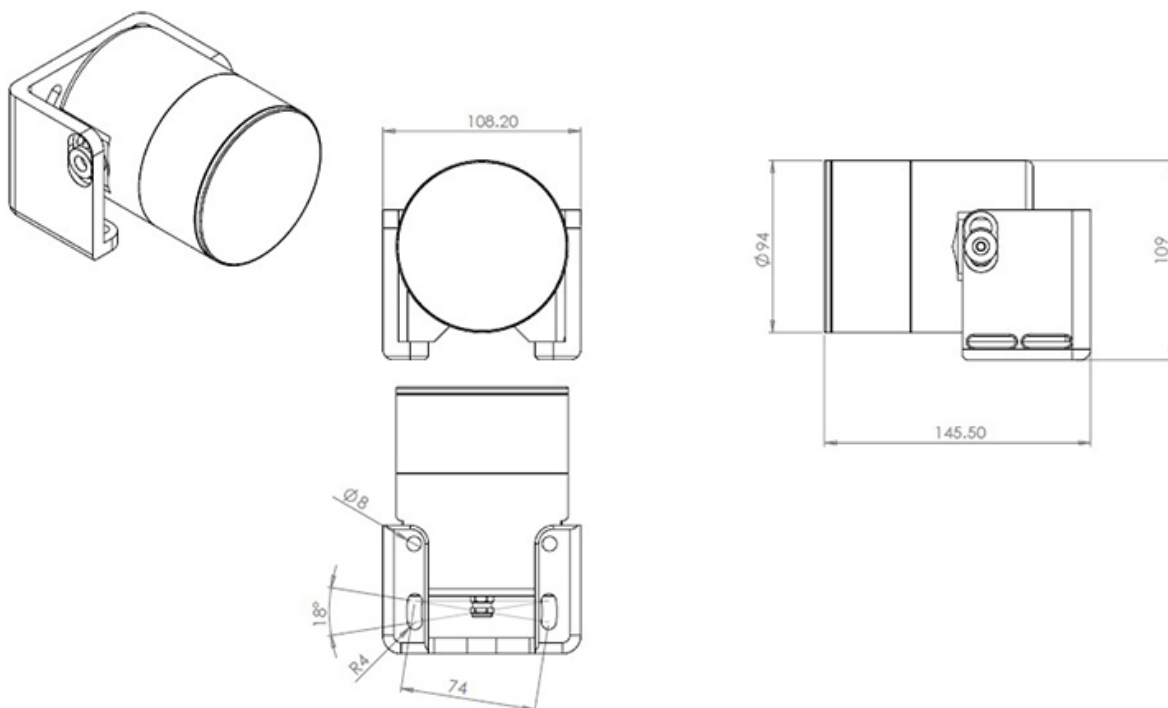

5380 EVICA ES12 REMOTE



ES12SM WITH NO SNOOT DIMENSIONS

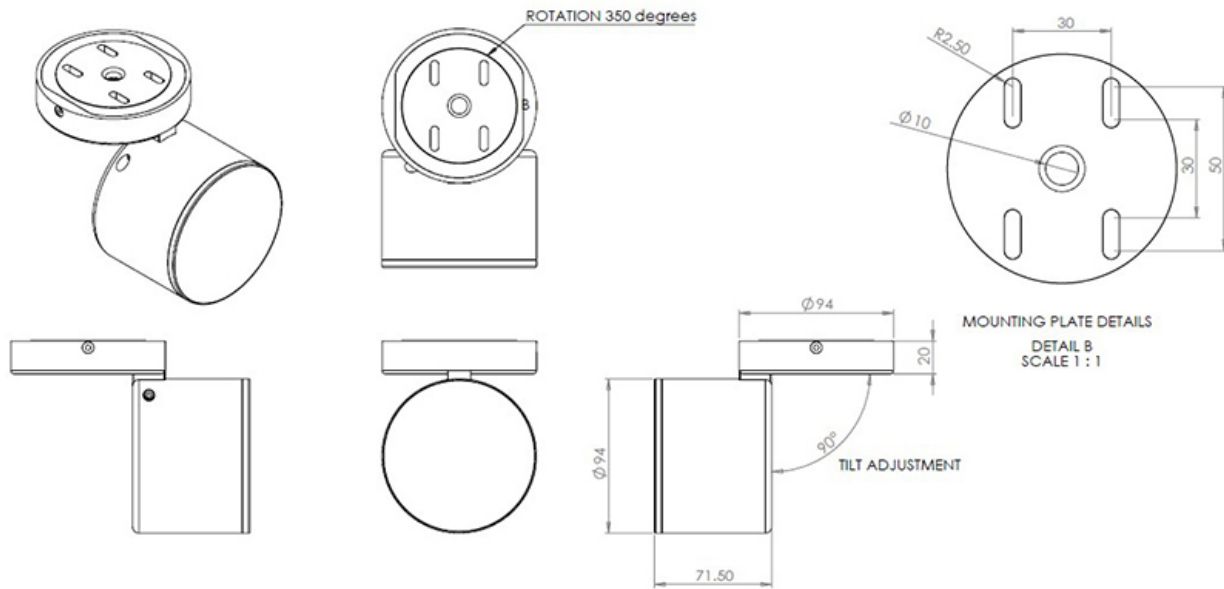



5380 EVICA ES12 REMOTE

PHOTOMETRIC CHARTS



2.8° BEAM ANGLE

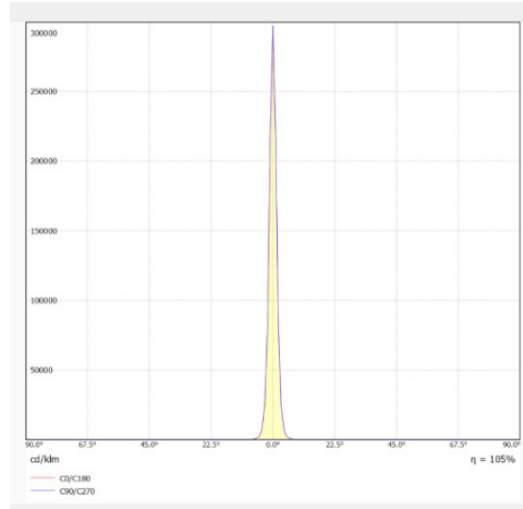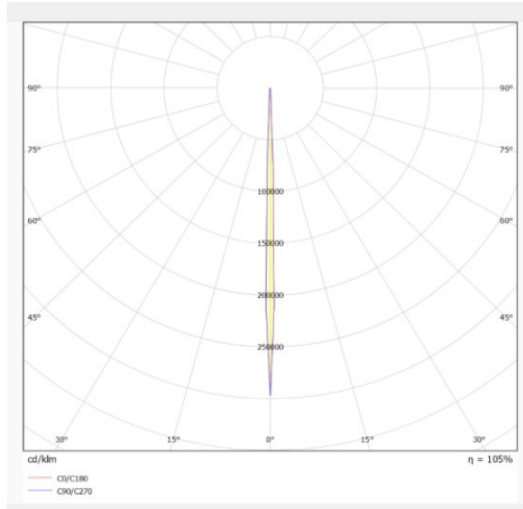

5° BEAM ANGLE

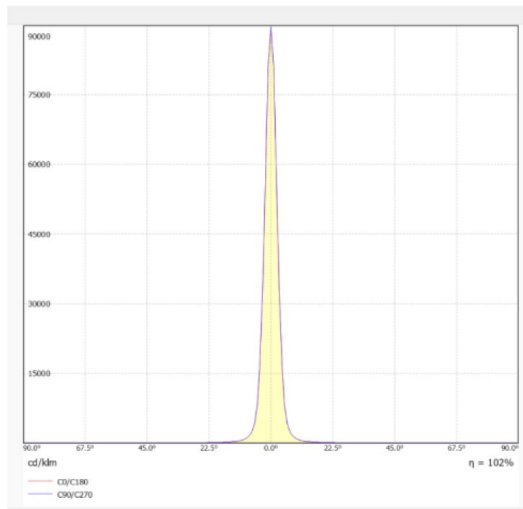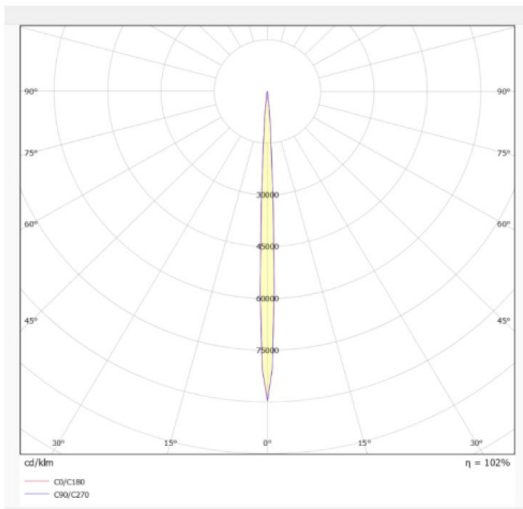



12° BEAM ANGLE

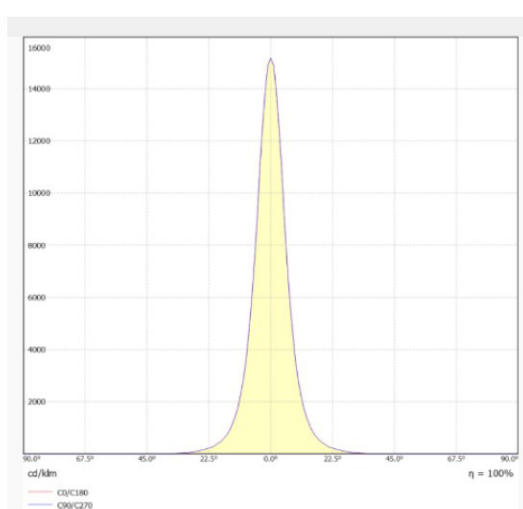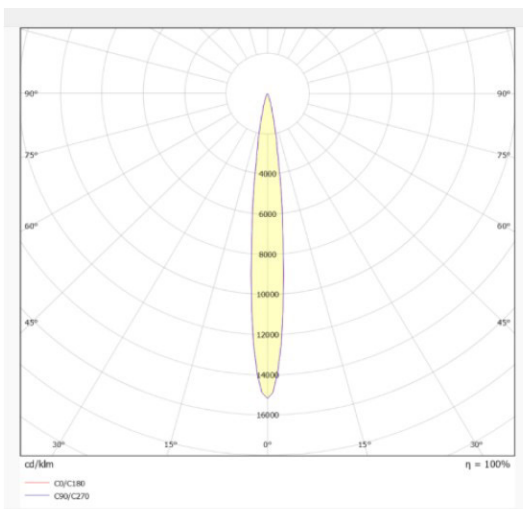

5380 EVICA ES12 REMOTE

PHOTOMETRIC CHARTS

34° BEAM ANGLE

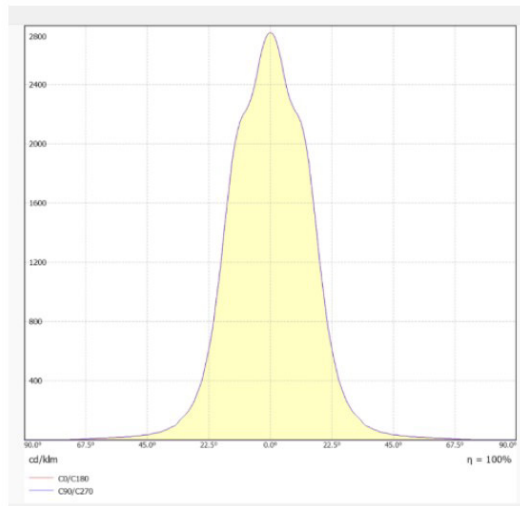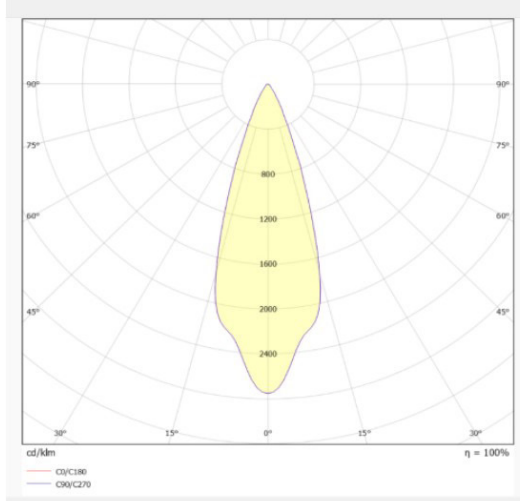

60° BEAM ANGLE

