

COMFORT GLOW TILT PRO



STANDARD





TRIMLESS




PIN HOLE

Introducing the Comfort Glow Tilt Pro Series – our anti-glare architectural lighting solutions designed with an ultra-wide beam angle while ensuring $UGR < 10$. Perfect for creating comfortable lighting environments in various settings. With power options ranging from 5W to 25W, these lights are ideal for ceiling heights from 2M to 8M, making them suitable for commercial, residential and retail applications.

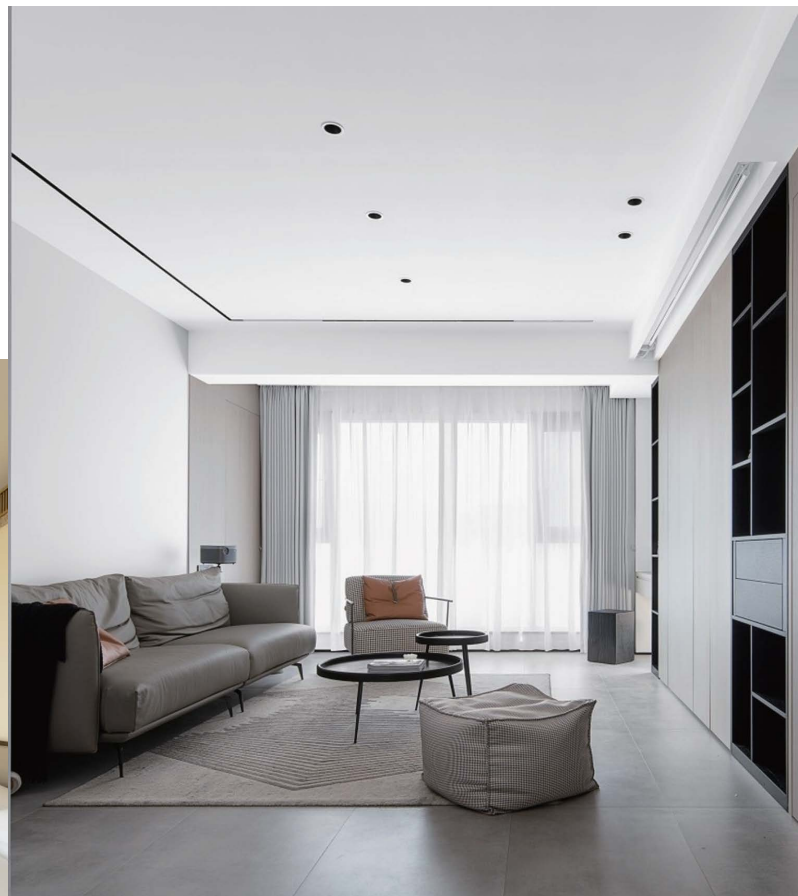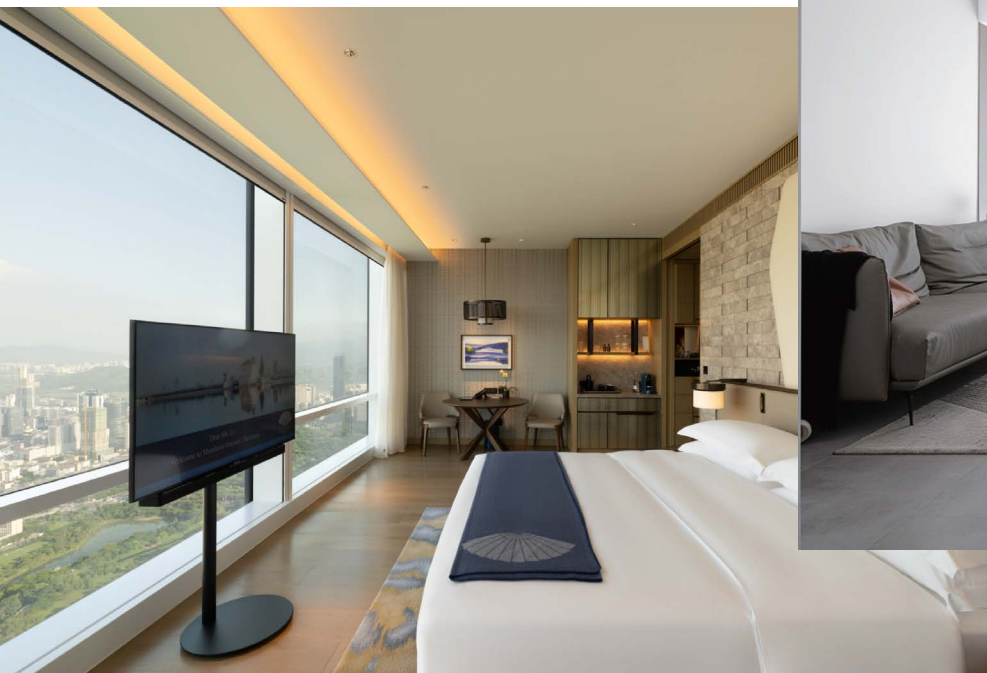



COMFORT GLOW TILT PRO

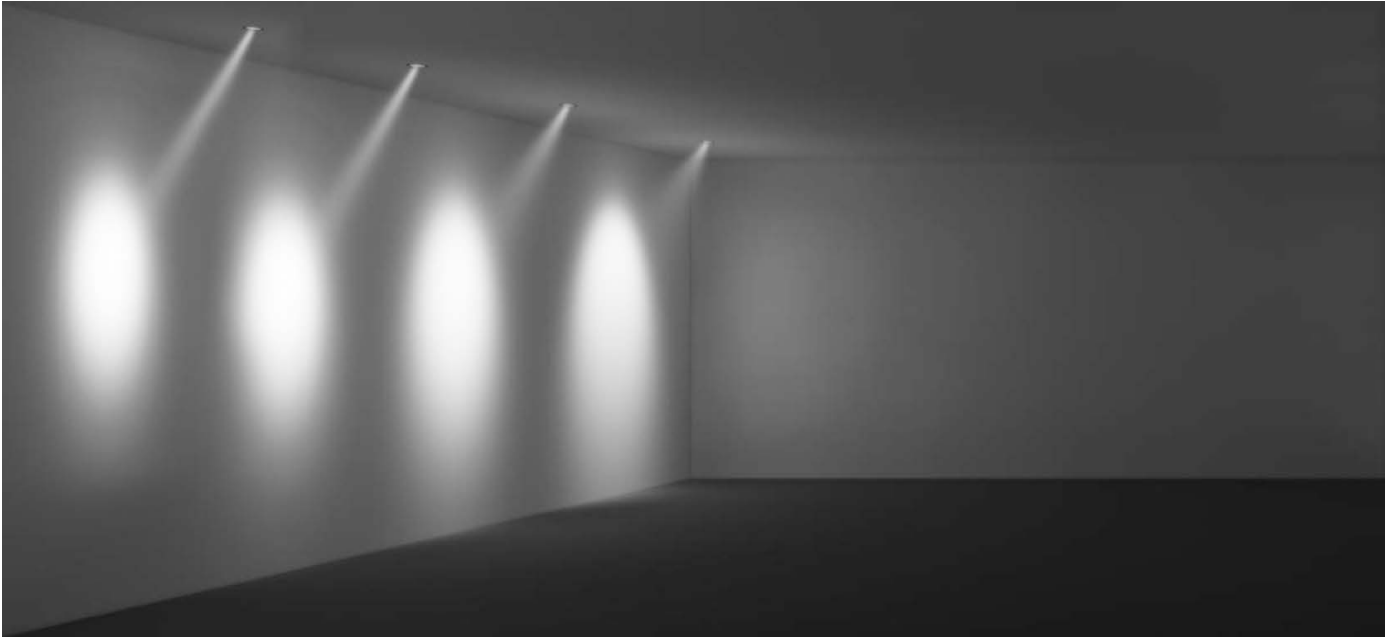

Available in four different beam angles: 15°, 24°, 36°, 50°. The render above illustrates the effect of these beam angles.

Adjustable downlights that allows objects or architectural elements to be highlighted.

Ideal Angle of Tilt
Model Size 62/107mm = 30°
Model Size 75mm = 25°

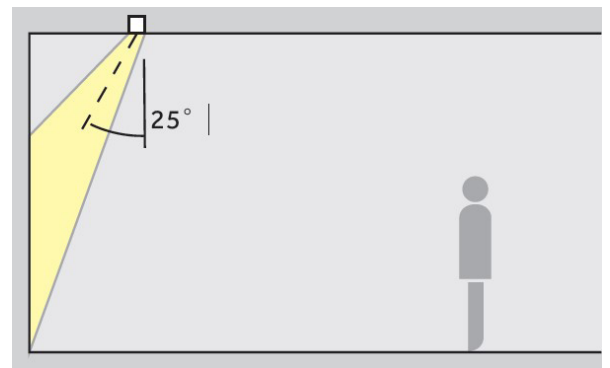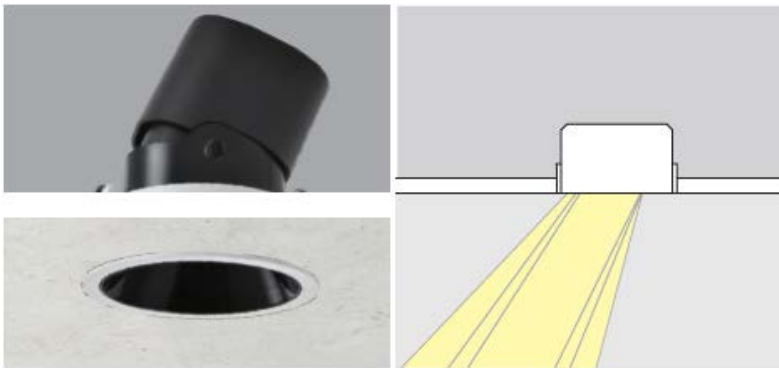

They are very discreet and produce very little glare with a variety of trim finishes. Each size comes in Standard, Trimless and Pin Hole trims.



Champagne Gold



Chrome



Black



White

6102000 62MM COMFORT GLOW TILT DOWNLIGHT

TECHNICAL DETAILS

Light Source: Bridgelux® Gen 8 V4A HD
 Warranty: 5 Years
 Colour Consistency: 3 step MacAdam ellipses
 LED Lifetime: 50,000Hrs (70% lumen maintenance)
 Min/Max Ambient Temperature: -15° ~ 45° C
 Hole Cut Out Size: Ø55mm
 Fitting Material: Aluminium
 Fitting Finish: Polyester Powder Coated
 Weight: 0.14Kg



IP20  Class 2  0.5m |   Dimmable Options

EXAMPLE SPECIFICATION

6102000-007-07-927-15-2

Comfort Glow Tilttable Downlight with 62mm Standard Trim, 7W / 150mA Casambi Dim Driver, 90+CRI 2700K LED, Narrow (15°) Optic, Black Reflector, Trim Black Finish.

PRODUCT CODE EXAMPLE: 61020 0 0 - 007 - 08 - 927 - N - 2 - 2

TRIM	STANDARD	TRIMLESS	PIN HOLE
Code	0	1	2

POWER	5W	7W
Code	005	007

DIMMING	NON DIM	TRAIC	0/1-10V	DALI	CASAMBI	SILVAIR
Code	01	02	03	04	08	09

LED SOURCE LUMENS MEASURED WITH T_c = 70°C

CCT (K)	CRI	LUMEN OUTPUT		Code
		5W / 120mA (lm)	7W / 150mA (lm)	
2700K	90	450	610	927
3000K	90	480	640	930
3500K	90	500	660	935
4000K	90	510	680	940


OPTICS	Narrow		Medium		Wide		Extra Wide	
TRIM	Standard	Pin Hole	Standard	Pin Hole	Standard	Pin Hole	Standard	Pin Hole
BEAM ANGLE	15°	10°	24°	24°	36°	36°	60	NA
Code	N		M		W		EW	

REFLECTOR	WHITE	BLACK	CHROME	CHAMPANGE GOLD
Code	1	2	3	4


FINISH	PTFE White RAL 9016	PTFE Black RAL 9011
Code	1	2

6102000 62MM COMFORT GLOW TILT PRO DOWNLIGHT


STANDARD

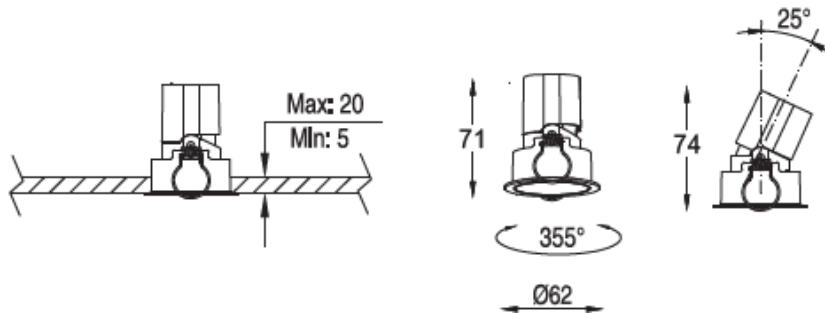

TRIMLESS

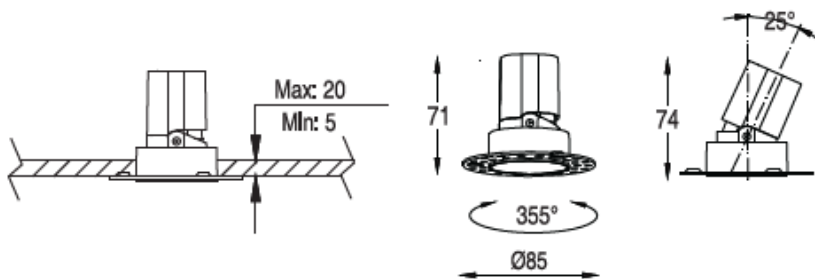

PIN HOLE

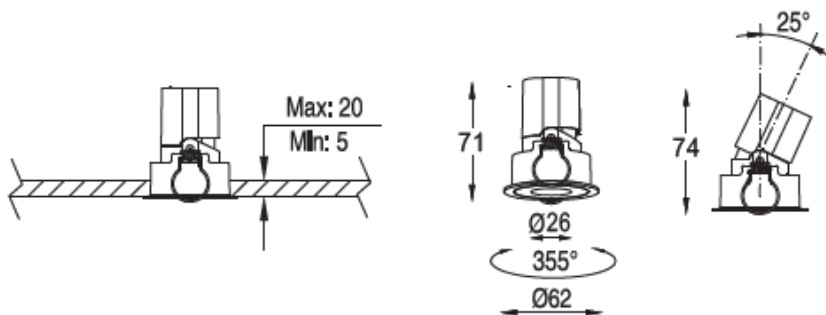

6102100 82MM COMFORT GLOW TILT PRO DOWNLIGHT

TECHNICAL DETAILS

Light Source: Bridgelux® Gen 8 V4A HD
 Warranty: 5 Years
 Colour Consistency: 3 step MacAdam ellipses
 LED Lifetime: 50,000Hrs (70% lumen maintenance)
 Min/Max Ambient Temperature: -15° ~ 45° C
 Hole Cut Out Size: Ø75mm
 Fitting Material: Aluminium
 Fitting Finish: Polyester Powder Coated
 Weight: 0.22Kg



IP20 Class 2 0.5m | Dimmable Options

EXAMPLE SPECIFICATION

6102100-012-08-927-15-2

Comfort Glow Tilttable Downlight with 82mm Standard Trim, 12W / 300mA Casambi Dim Driver, 90+CRI 2700K LED, Narrow (15°) Optic, Black Reflector, Trim Black Finish.

PRODUCT CODE EXAMPLE: 61021 0 0- 012 - 08 - 927 - N - 2 - 2

TRIM	STANDARD	TRIMLESS	PIN HOLE
Code	0	1	2

POWER	10W	12W
Code	010	012

DIMMING	NON DIM	TRAIC	0/1-10V	DALI	CASAMBI	SILVAIR
Code	01	02	03	04	08	09

LED SOURCE LUMENS MEASURED WITH T_c = 70°C

CCT (K)	CRI	LUMEN OUTPUT		Code
		10W / 250mA (lm)	12W / 300mA (lm)	
2700K	90	930	1260	927
3000K	90	980	1310	930
3500K	90	1010	1360	935
4000K	90	1030	1390	940


OPTICS	Narrow		Medium		Wide		Extra Wide	
TRIM	Standard	Pin Hole	Standard	Pin Hole	Standard	Pin Hole	Standard	Pin Hole
BEAM ANGLE	15°	10°	24°	24°	36°	36°	60	NA
Code	N		M		W		EW	

REFLECTOR	WHITE	BLACK	CHROME	CHAMPANGE GOLD
Code	1	2	3	4


FINISH	PTFE White RAL 9016	PTFE Black RAL 9011
Code	1	2

6102100 82MM COMFORT GLOW TILT PRO DOWNLIGHT


STANDARD

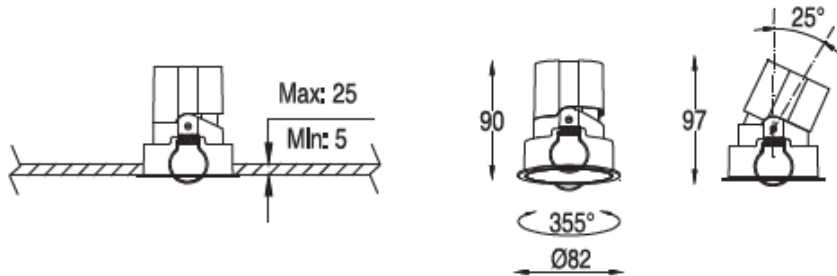

TRIMLESS

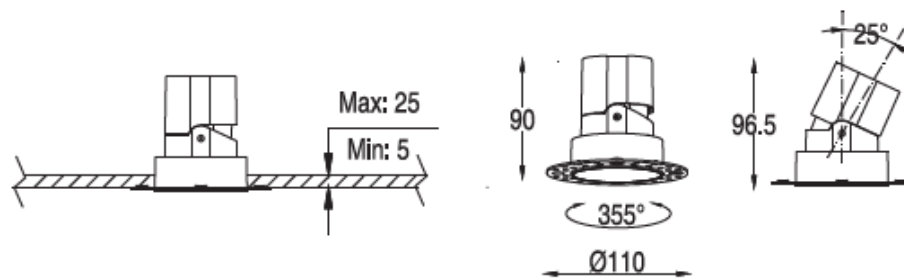


PIN HOLE

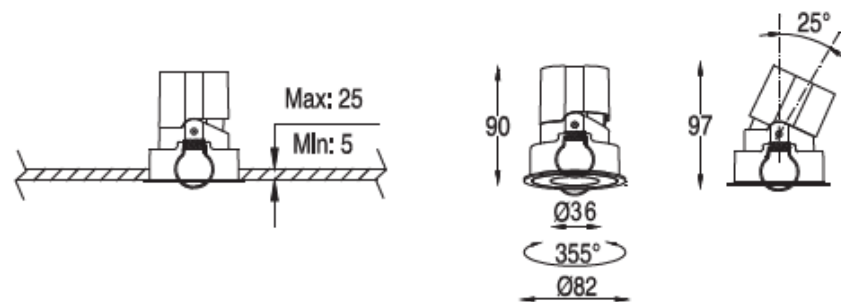

6102101 82MM COMFORT GLOW TILT PRO NARROW DOWNLIGHT

TECHNICAL DETAILS

Light Source: Bridgelux® Gen 8 V4A HD
 Warranty: 5 Years
 Colour Consistency: 3 step MacAdam ellipses
 LED Lifetime: 50,000Hrs (70% lumen maintenance)
 Min/Max Ambient Temperature: -15° ~ 45° C
 Hole Cut Out Size: Ø75mm
 Fitting Material: Aluminium
 Fitting Finish: Polyester Powder Coated
 Weight: 0.22Kg

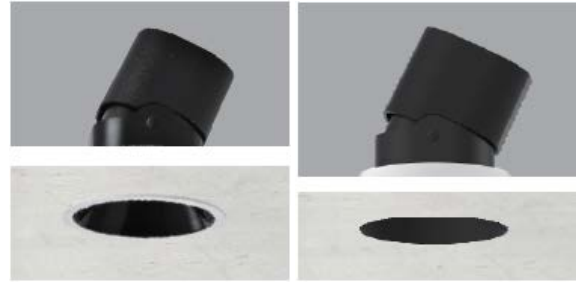

IP20 Class 2 0.5m | Dimmable Options

EXAMPLE SPECIFICATION

6102101-008-08-927-15-2

Comfort Glow Tilttable Narrow Downlight with 82mm Standard Trim, 8W / 180mA Casambi Dim Driver, 90+CRI 2700K LED, Narrow (10°) Optic, Black Reflector, Trim Black Finish.

PRODUCT CODE EXAMPLE: 61021 0 1 - 008 - 08 - 927 - N - 2 - 2

TRIM	STANDARD	TRIMLESS
Code	0	1

POWER	8W
Code	008

DIMMING	NON DIM	TRAIC	0/1-10V	DALI	CASAMBI	SILVAIR
Code	01	02	03	04	08	09

LED SOURCE LUMENS MEASURED WITH T_c = 70°C

CCT (K)	CRI	LUMEN OUTPUT	Code
		8W / 180mA (lm)	
2700K	90	610	927
3000K	90	640	930
3500K	90	660	935
4000K	90	680	940


OPTICS	Narrow
BEAM ANGLE	10°
Code	N

REFLECTOR	WHITE	BLACK	CHROME	CHAMPANGE GOLD
Code	1	2	3	4

FINISH	PTFE White RAL 9016	PTFE Black RAL 9011
Code	1	2

6102101 82MM COMFORT GLOW TILT PRO NARROW DOWNLIGHT

STANDARD

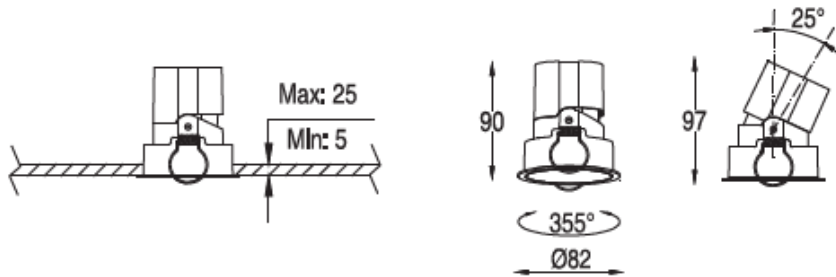

TRIMLESS

