9460000 EXHIBIT PRO ORBIX RECESSED

TECHNICAL DETAILS

- Exhibit Pro Orbix Mini Recessed Spotlight
- Light Source: CREE XP-G3 SMD LED (3 SDCM Binning)
- Gimbal Adjustability: ±15° tilting and 350° rotating
- Hermetic Seal
- Colour Rendering: Min 90+CRI, Typical 92 CRI
- Mounting: Locking Nut for Surface Mount
- Supply: 2.7V 500mA
- Housing: Aluminium
- Finish: Raw or Electrophoretic Paint
- Max Ambient Temperature: 40°C
- LED Lifetime (L90): 50,000hrs
- Weight: 0.2kg

UK CA CE Class 3 Dimmable Options



EXAMPLE SPECIFICATION

9460000-927-12-2
Xhibit Pro Orbix Mini Recessed Spotlight with Lock Nut Mount, Assembled, 90+ CRI, Incandescent White 2700K, 12° Beam Angle, Black RAL 9011 Finish

PRODUCT CODE EXAMPLE: 946000 **0 - 927 - 12 - 2**

DIMMING	Assembled	Kit
Code	0	1

SOURCE LUMENS

COLOUR	CCT (K)	MIN CRI	LUMEN OUTPUT 500mA (lm)	Code
Incandescent White	2700	90+	171	927
Warm White	3000	90+	179	930
Cool White	4000	90+	204	940

BEAM	12° Narrow 1	15° Narrow 2	25° Medium 1	35° Medium 2	40° Wide	60° Extra Wide
Code	12	15	25	35	40	60

FINISH	Raw Aluminium	White (RAL 9016)	Black (RAL 9011)	Special (RAL / BS)
Code	0	1	2	3

REMOTE DRIVERS

20W 500mA LED Driver Phase Dimmable - Min 2, Max 14 Fittings	421886-500-10
20W 500mA LED Driver DALI Dimmable - Min 1, Max 14 Fittings	421892-500-10
20W 500mA LED Driver 1-10V Dimmable - Min 1, Max 14 Fittings	421893-500-10
20W 500mA LED Driver Casambi Dimmable - Min 2, Max 14 Fittings	421894-500-10
15W 500mA LED Driver Silvair Dimmable - Min 3, Max 10 Fittings	421896-500-10
6W 500mA LED Driver DMX Dimmable - Min 1, Max 7 Fittings	421895-500-10

SPOTLIGHT LED POWER

POWER (W)	500mA
Power	1.4W
Forward Voltage	2.7V


CASAMBI DONGAL- For use with DALI driver
Enclosure Dimensions: 64mm x 19mm x 13mm
Part Number: 273-4924




Light Projects specifications are liable to be changed without notice.

9460000 EXHIBIT PRO ORBIX RECESSED


DIMENSIONS

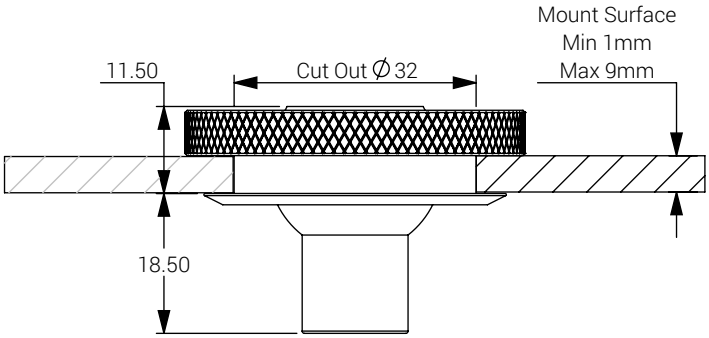

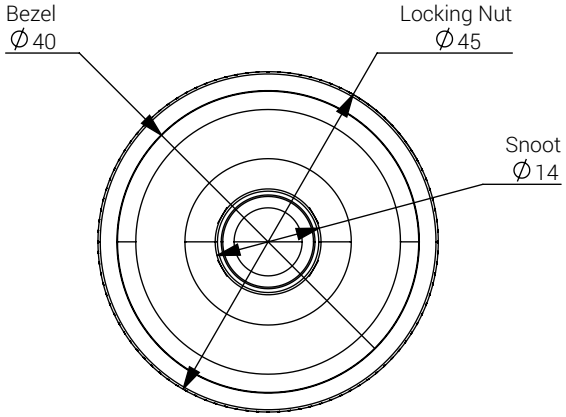


ACCESSORIES

10-way Series Splitter **94600930**

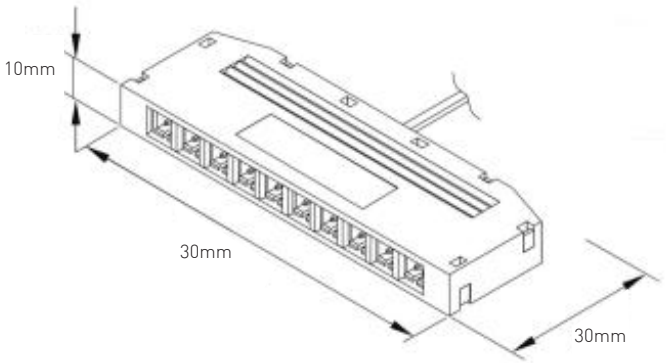


6-way Series Splitter **94600931**

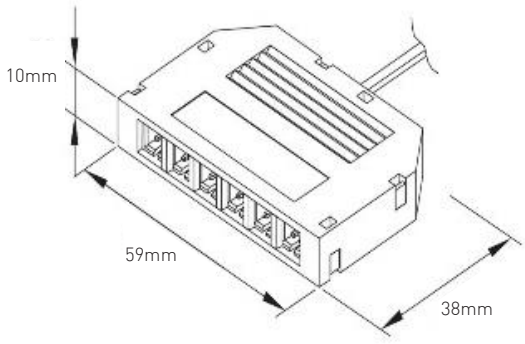

Series Splitter Blanking Plug **94600939**

One Required for every
unused socket in splitter

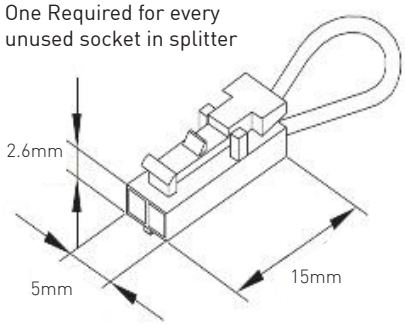

Light Projects specifications are liable to be changed without notice.