94700000 XHIBIT PRO INDOT

TECHNICAL DETAILS

- Interior induction powered LED Spotlight
- Light Source: LED
- Supply Voltage: 24Vdc
- Source Wattage: 1W
- Colour Consistency: 3 SDCM
- Housing: Aluminium Alloy Body + Plastic Receiver Base
- Finish: Electrostatic Powder Coating
- Tilting Range: 0-90°
- Operating Temperature: -20°C ~ 40°C
- LED Lifetime (L70): ›30,000 hrs / B10-Ta25°C (LM-80/TM-21)
- Weight: 0.01kg



Class 3 CE UK CA

EXAMPLE SPECIFICATION

94700000-9530-Z-2
XHIBIT PRO INDOT Spotlight 95+ CRI, Warm White 3000K,
8°-40° Zoom Beam Angle, Black Finish


94700000 - **9530** - **Z** - **2**

COLOUR	CCT (K)	CRI	SOURCE LUMEN	Code
Warm White	3000	95+	97	**9530**
Cool White	4000	95+	112	**9540**

BEAM	8°-40° Zoom
Code	**Z**

FINISHES	White	Black
Code	**1**	**2**


DIMENSIONS



ACCESSORIES + POWER SUPPLIES

Transmitter Strip 420x53x3.2mm	94700931
Transmitter Strip 840x53x3.2mm	94700932
Transmitter Controller	94700939
40W 24VDC PSU	273-858-040
80W 24VDC PSU	273-858-080
100W 24VDC PSU	273-858-100

GENERAL LAYOUT

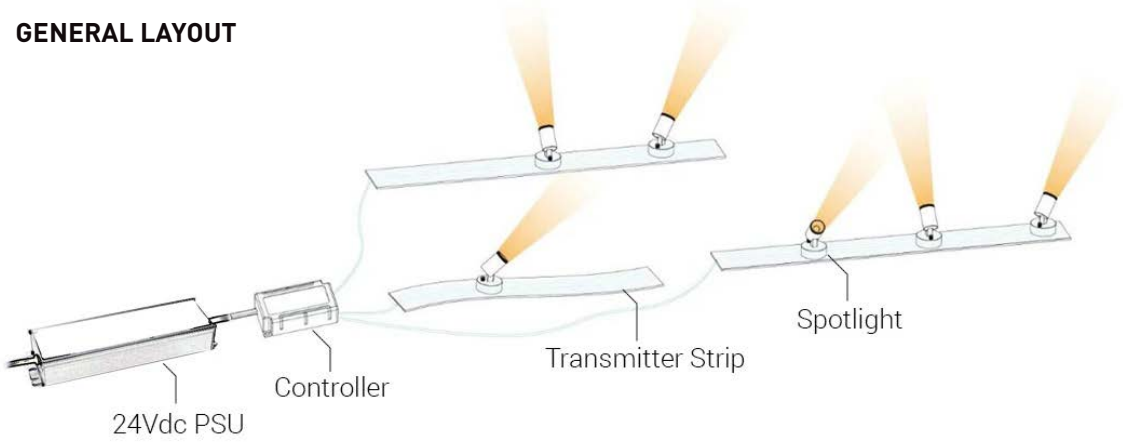

The distance between the wireless luminaire and the "transmitter strip" is maximum 8mm.
The separator in between must be non-metallic.
To dim the spotlight you can position it towards the edge of the transmitter strip.

Light Projects specifications are liable to be changed without notice.