

53804 EVICA ES12 TRACK

TECHNICAL DETAILS

Cooling	Convection
IP rating	IP20
Light Source	Fidelity 12W
Standard CCT	3000K Options 2700K/3000K/4000k/5600k/6500k
Standard CRI	98+
Supply Voltage	15-48v
Housing material	Aluminium Anodised Black Options RAL Powder coated
Weight (Kg)	0.7
Beam Angles	2.8° / 5° / 12° / 34° / 60°
Head Diameter	95mm
Head Width	65mm
LED Lifetime	>85% lm at 60000 hours
Mounting ES12t	Global, Stucchi, Eutrac and Unipro compatible
Safety & EMC	BS EN 60598-1, EAC TP TC 020/2011 approved
Safety standards	EMC Emissions: Compliance to BS/EN55015, EAC TP TC 020 EMC Immunity: Compliance to BS/EN61000-4-2,3,4,6,8, light industry level, criteria A, EAC TP TC 020



ES12t
Track Mount

UK CA CE IP20 Class 2 □ ◯ 0.5m | ⚠ Dimmable Options

53804 EVICA ES12 TRACK

EXAMPLE SPECIFICATION

53804120-930-3-2A

ES12t Track fitting with No Snoot and Sealed Glass Front, IP20, Stirrup Mount, Gallery White 3000K 98 CRI LED, Phase Dim, 2.8° Beam Angle, Black Anodised Finish.

PRODUCT CODE EXAMPLE: 5380 4 1 2 0 - 930 - 3 - 2A

STYLE	Track					
Code	4					
SNOOT	No Snoot, No Glass	Half Snoot, No Glass	Full Snoot, No Glass	No Snoot + Glass	Half Snoot + Glass	Full Snoot + Glass
Code	1	2	3	4	5	6
GEAR VARIANT	Switch	Phase	1-10V	DALI	Casambi	
Code	1	2	4	5	6	
LED COLOUR	Incandcent White 2700K 98+ CRI	Warm White 3000K 98+ CRI	Cool White 4000K 98+ CRI	Neutral White 5600K 98+ CRI	Daylight White 6500K 98+ CRI	
Lumens	710lm - 59lm/W	760lm - 63lm/W	820lm - 68lm/W	795lm - 66lm/W	820lm - 68lm/W	
Code	927	930	940	956	965	
BEAM ANGLE	2.8°	5°	12°	34°	60°	
Code	3	5	12	34	60	
HOUSING FINISH	White Painted RAL 9010	Black Anodised RAL 9005*	Anthracite Anodised RAL 7038*	Silver Anodised RAL 9006*	Special Custom Painted**	
Code	1	2A	5E	9	3	

* Anodised finishes indicate approximate RAL colour match

** Please specify custom RAL colour

ACCESSORIES

General Accessories and Spares	CODE
Front Ring Plain	53809201-f
Full Snoot Plain	53809202-f
Half Snoot Plain	53809203-f
Honeycomb Louvre	53809204
Concentric Louvre	53809205
Barn Doors	53809206
Front Ring + Glass & Seals	53809211-f
Full Snoot + Glass & Seals	53809212-f
Half Snoot + Glass & Seals	53809213-f
Honeycomb + Glass & Seals	53809214
Concentric + Glass & Seals	53809215

f - Specify finish code from housing finish list from above

MODULAR OPTIONAL EXTRAS



HONEYCOMB LOUVRE



CONCENTRIC LOUVRE



IP65 GLASS SEALING KIT



HALF SNOOT




FULL SNOOT



BARN DOORS WITH FILTER HOLDER

53804 EVICA ES12 TRACK



ES12T WITH NO SNOOT DIMENSIONS

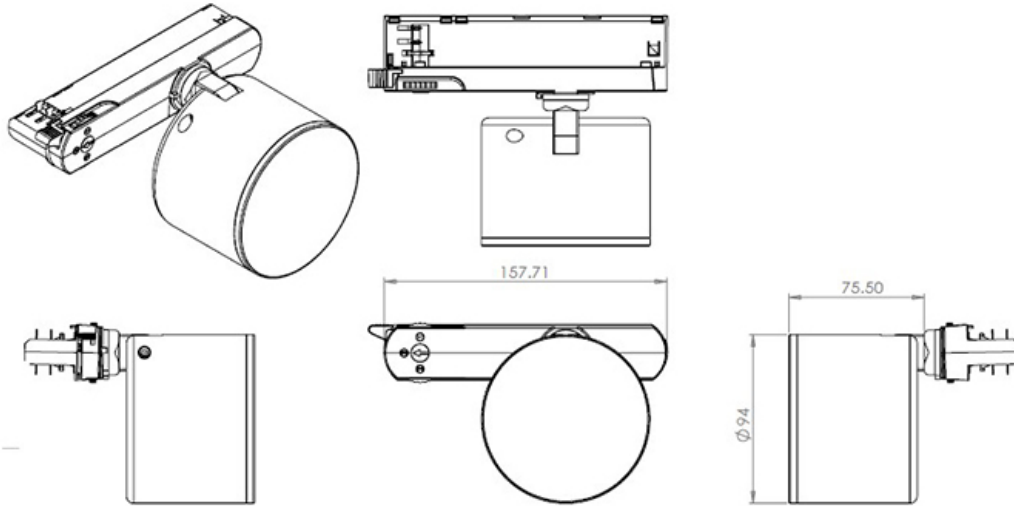



53804 EVICA ES12 TRACK

PHOTOMETRIC CHARTS



2.8° BEAM ANGLE

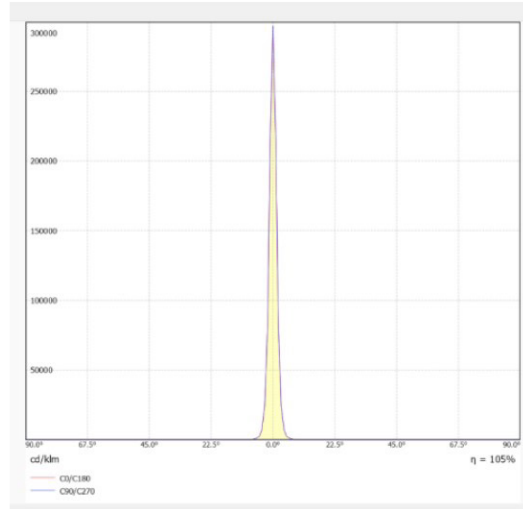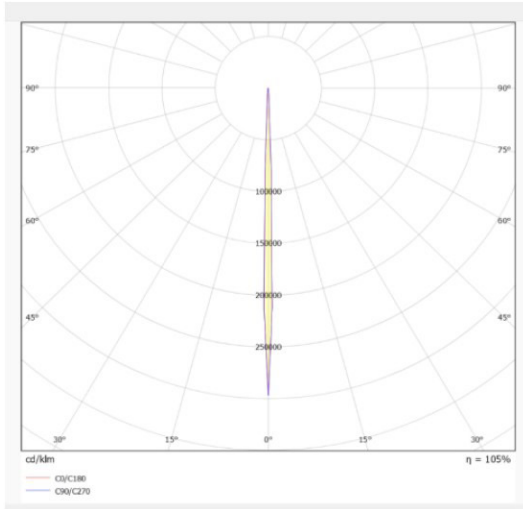

5° BEAM ANGLE

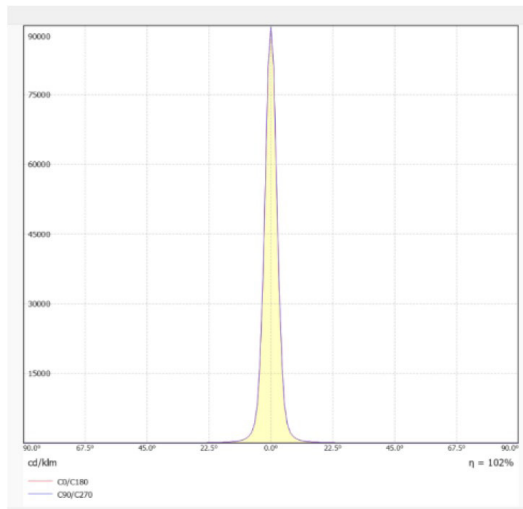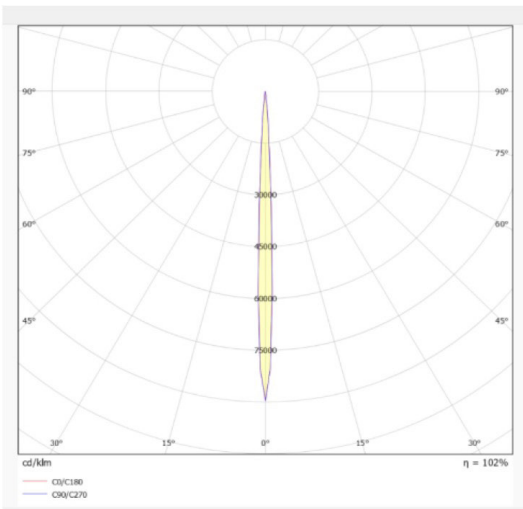



12° BEAM ANGLE

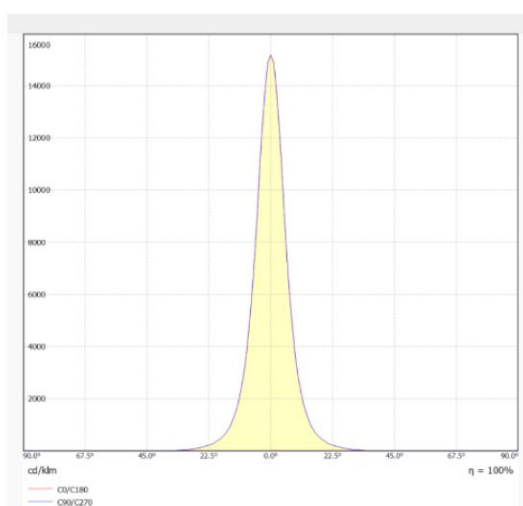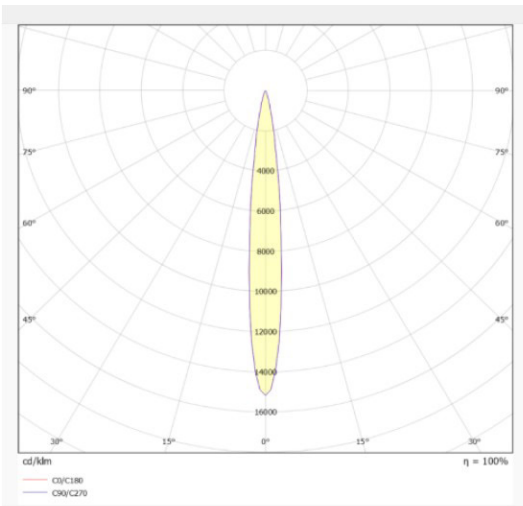

53804 EVICA ES12 TRACK

PHOTOMETRIC CHARTS

34° BEAM ANGLE

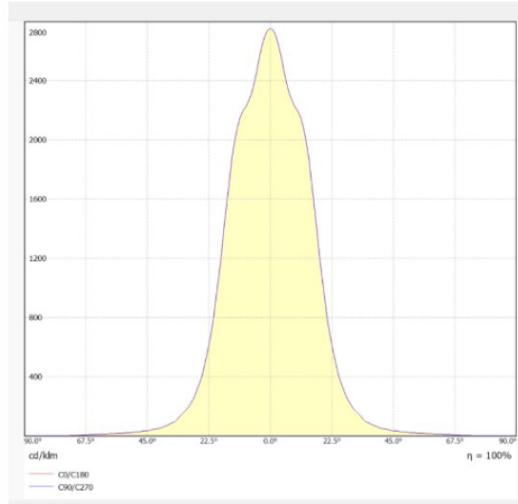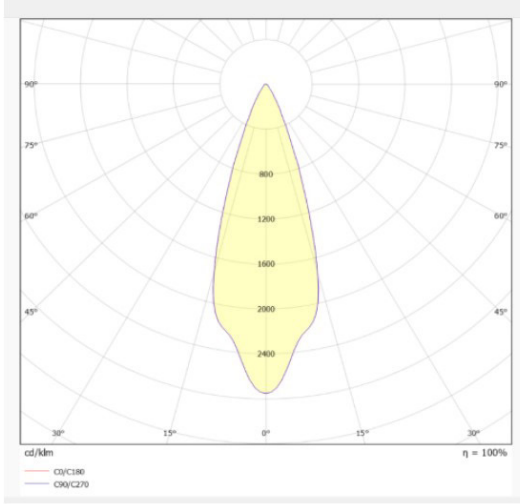

60° BEAM ANGLE

