94710000 XHIBIT PRO TRACK

TECHNICAL DETAILS



- Interior LV Track LED Spotlight
- Light Source: LED
- Supply Voltage: 24Vdc
- Source Wattage: 1.5W
- Colour Consistency: 3 SDCM
- Housing: Aluminium Alloy Body + Plastic Track Adapter
- Finish: Liquid Baked Enamel
- Projection Range: Horizontal 0°~365° adjustment; Vertical 0~90° adjustment
- Operating Temperature: -20°C ~ 40°C
- LED Lifetime (L70): ›50,000 hrs / B10-Ta25°C (LM-80/TM-21)
- Weight: 0.02kg

Class 3 CE UK CA

EXAMPLE SPECIFICATION

94710000-9530-Z-2
XHIBIT PRO TRACK Micro Spotlight, Remote Dimming, 95+ CRI, Warm White 3000K, 10°-40° Zoom Beam Angle, Black Finish

9471000 **0 - 9530 - Z - 2**

DIMMING TYPE	Remote	Remote + Self Dim
Code	0	1

COLOUR	CCT (K)	CRI	SOURCE LUMEN	Code
Warm White	3000	95+	145	9530
Cool White	4000	95+	168	9540


BEAM	15° Narrow	24° Medium	36° Wide	60° Indicator	10°-40° Zoom	Wall Wash
Code	15	24	36	60	Z	WW

FINISHES	Black
Code	2

TRACK COMPONENTS

All Black unless otherwise stated

MICRO LOW VOLTAGE TRACK




0.5m	94710901-0500-2
1.0m	94710901-1000-2
1.5m	94710901-1500-2
2.0m	94710901-2000-2


OTHER COMPONENTS

Track Live End With 300mm Cable	94710911-2
Straight Coupler	94710912-2
Flexible Track Connector with 300mm Cable	94710913-2
L Coupler	94710914-2
T Coupler	94710915-2
Cable Entry End Cap	94710917-2
Plain End Cap	94710918-2
Mount Clips 20x16x13mm, Raw Aluminium	94710919

LIVE END



L COUPLER




STRAIGHT COUPLER



T COUPLER




FLEXIBLE COUPLER




Light Projects specifications are liable to be changed without notice.

94710000 XHIBIT PRO TRACK


REMOTE DIM WITH FIXED OPTIC DIMENSIONS

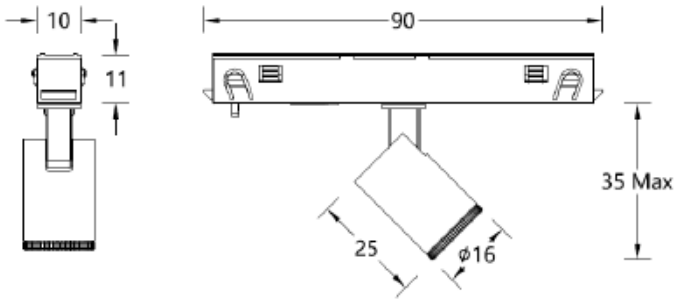


REMOTE DIM + ON BOARD DIM WITH FIXED OPTIC DIMENSIONS

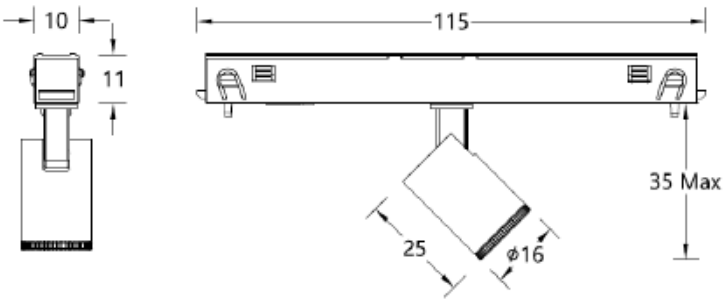

REMOTE DIM WITH ZOOM OPTIC DIMENSIONS

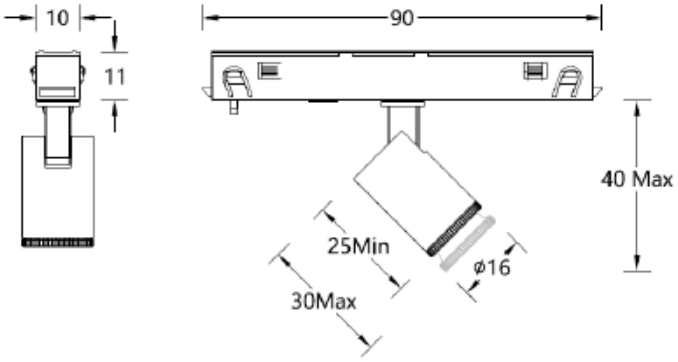


REMOTE DIM + ON BOARD DIM WITH ZOOM OPTIC DIMENSIONS

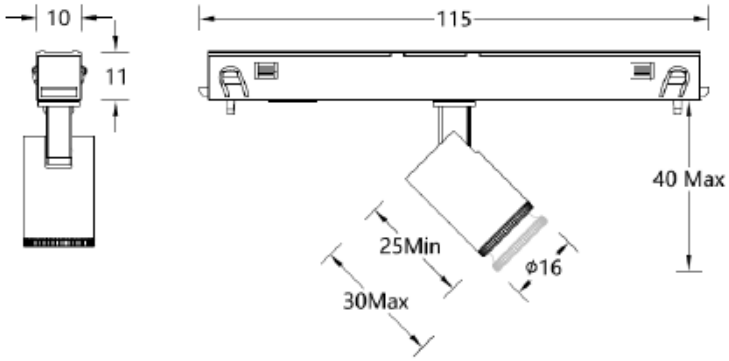


POWER SUPPLIES + DIMMERS

40W 24VDC PSU Non Dim	273-858-040
80W 24VDC PSU Non Dim	273-858-080
100W 24VDC PSU Non Dim	273-858-100
5A 1-10V Single Channel Dimmer	273-243
5A DALI Single Channel Dimmer	205-140-1

WIRING DIAGRAM WITHOUT DIMMER

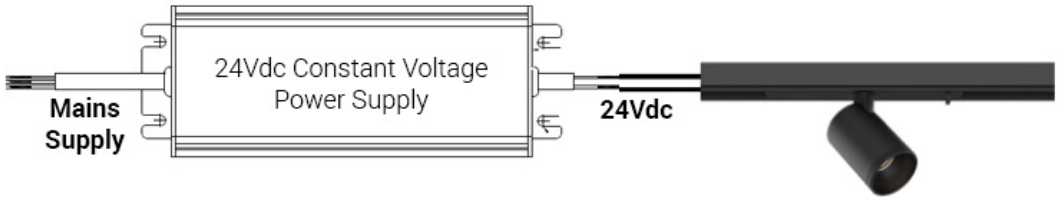

WIRING DIAGRAM WITH DIMMER

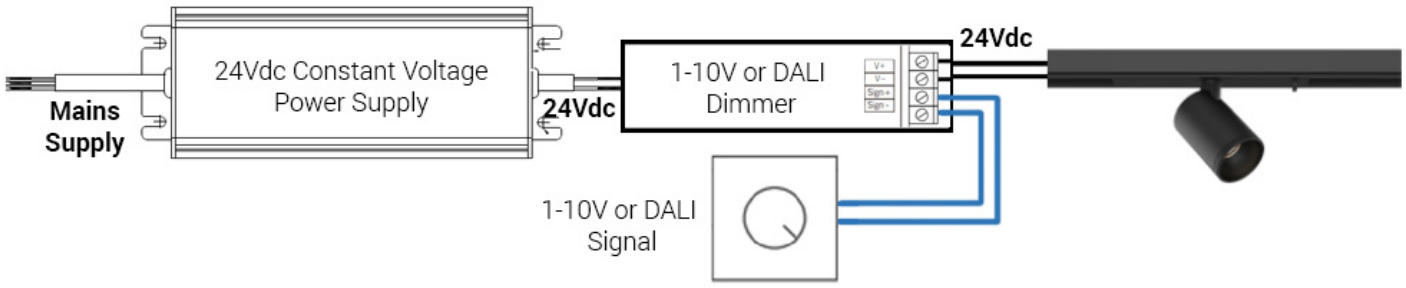

Light Projects specifications are liable to be changed without notice.